



NOTE:
 - STAINLESS STEEL TANK
 - FLOW RATE 6 LITERS x MIN.
 - MAX OPERATING PRESSURE 6 BAR (87 PSI)
 - ENVIROMENT TEMPERATURE OPERATING: 5° TO 35°C (41° TO 95°F)
 - WATER CAPACITY OF TANK: 15 LITERS
 WHEN PRESSURIZED, THE DEVICE THOROUGHLY WASHES EYES, FACE AND BODY BY PROVIDING UP TO THREE MINUTES OF WATER VIA THE APPROPRIATE VALVE.
 THE PRESSURE GAUGE AND SAFETY VALVE PREVENT EXTRA PRESSURIZATION AND ALLOW THE USER TO VENT THE CYLINDER FOR CLEANING AND MAINTENANCE.

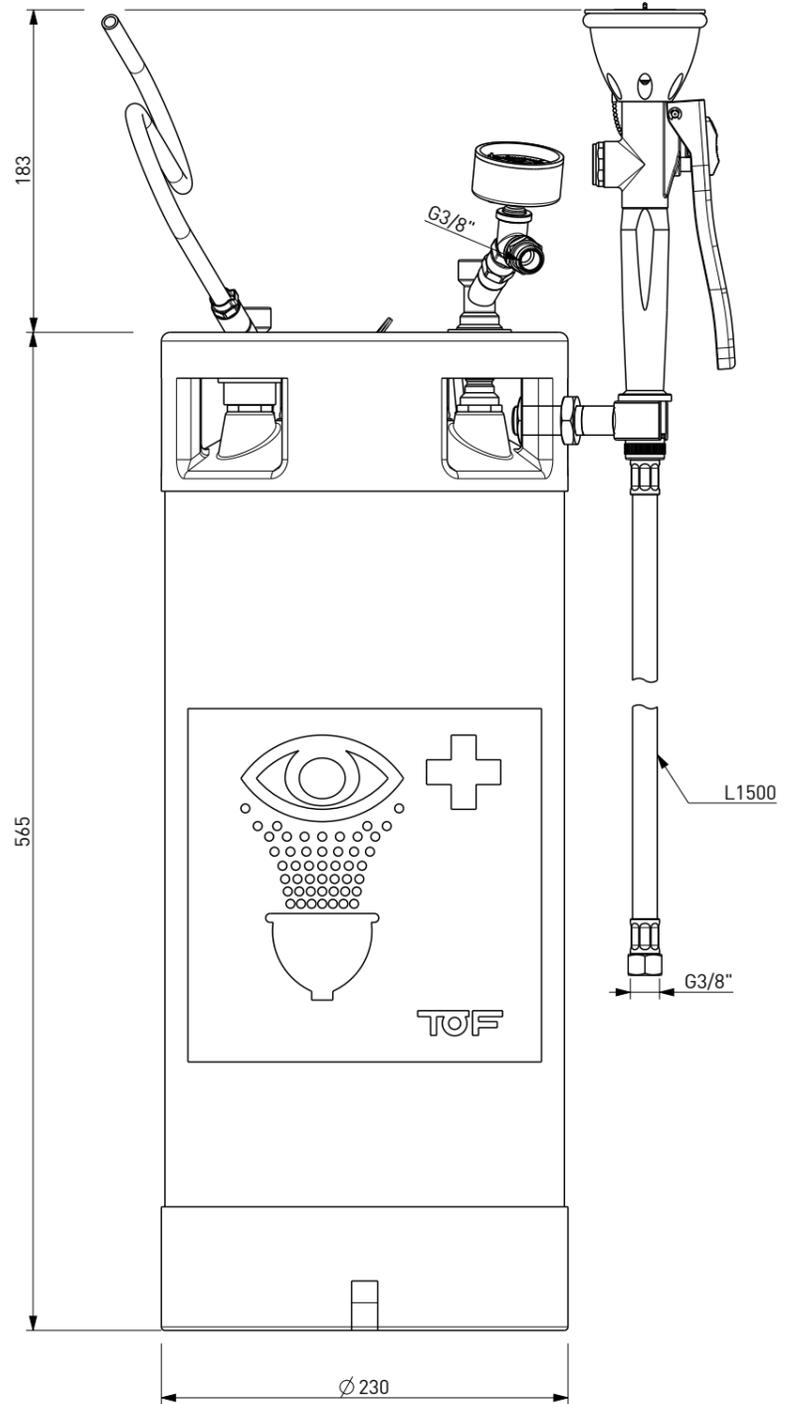

WATER DOOR INLET
 (ROTATE THE LEVER)

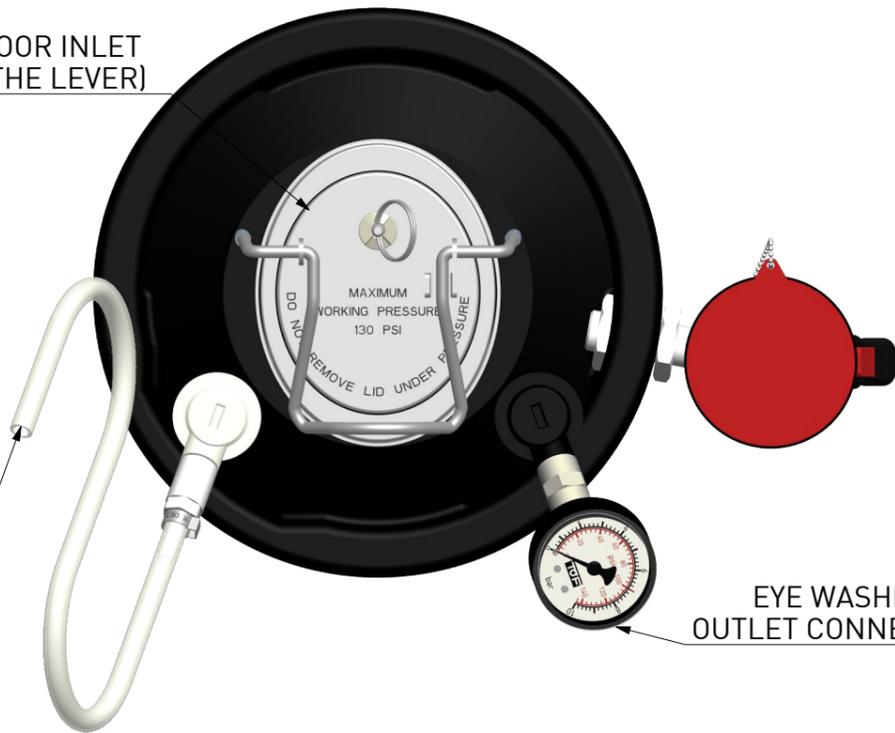

EYE WASHER
 OUTLET CONNECTION

AIR PRESSURE
 INPUT

CODE	FINISH	NOTES
1100/250-H	ROSSO / RED	
1100/250-G	VERDE / GREEN	
1100/250-D1	GIALLO / YELLOW	RAL 1016

FILE: 1100_250-H		DISEGNO DI PROPRIETA' RISERVATA A TUTTI GLI EFFETTI DI LEGGE			
ARCHIVIO: //		TOLLERANZE UNI EN ISO 22768-F TRANNE DOVE DIVERSAMENTE INDICATO			
REPARTO: MON-L		<input type="checkbox"/> QUOTE IMPORTANTI <input checked="" type="checkbox"/> ESPONENTE DI MODIFICA			
SCALA: 1:4		MATERIALE: DIVERSI / VARIOUS		GRUPPO	
NORMATIVE:		DIS.N°: 1100/250-H		- DOCCE DI EMERGENZA / EMERGENCY SHOWERS	
		- FUSTO PORTATILE CON DOCCETTA ESTRAIBILE			
		- PORTABLE EYE-WASH UNIT WITH WATER TANK			
Rev.	DATA	DESCRIZIONE	DIS.	DEL.	PEZZO GREZZO Kg :
8	15-10-2024	AGGIORNAMENTO 3D / 3D UPDATE	MB	TD	PEZZO FINITO Kg : 5.7
PRIMA EMISSIONE: 06-05-2000					DISEGNO STAMPO:
NOTE:					FORMATO: A3
					FOGLIO: 1